

# Flow Monitor Flow Indicator

## DKME/A



### Operation

The flow monitors and indicators type DKME/A operate with the float measuring principle



### Application



The flow monitors and indicators type DKME/A are used for measuring and monitoring the flow of oils and other viscous media.

They are designed in such a way, that also with changes of viscosity, a reliable limit value monitoring is possible. Here the kinematic viscosity may vary between 30 cSt and 600 cSt.

The instruments are predominantly used in lubricant systems.

Areas of application are:

- Central lubrication
- Circulation lubrication
- Transformers



### Features

The DKME/A series proves itself through reliable function and easy handling. Further characteristics of this sturdy type are:

- universal mounting
- high reliability
- viscosity compensated
- high switch accuracy
- wide switch range
- infinitely variable switchpoint adjustment through user
- EX-version to ATEX available
- high pressure resistance

### Installation hints

The installation of the flow monitor can be done in any way in the system. The flow direction must be observed.

The flow monitor must not be used as a supporting part in a pipeconstruction!

The medium must not contain any solid particles! We recommend the installation of strainers type SFD or SFM.



External magnetic fields influence the switch contact. Keep adequate distance to those magnetic fields (e.g. electromotors)!

The operating instruction for DKME/A must be observed under any circumstances!



# Measuring Ranges, Technical Data

## Connection diagram

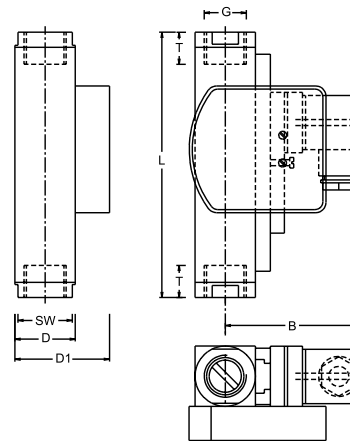

DKME/A

## Summary of types DKME/A

Type	Switch range* [l/min]	Overall dimensions [mm]								Weight approx. [g]
		SW	D	D1	B	G	DN	T	L	
DKME/A - 1/20	1 - 20	34	40	57	76	1/2"	15	21	152	1510
DKME/A - 1/40	4 - 40	34					20	21	152	1425
		40				1"	25	17	130	1245
DKME/A - 1/50	5 - 50	34	40	57	76	3/4"	20	21	152	1425
DKME/A - 1/60	8 - 60	40					25	17	130	1245
DKME/A - 1/70	12 - 70	34				1"	25	17	130	1245
DKME/A - 1/80	15 - 80	40	40	57	76	1"	25	17	130	1245

\* for mineral oil with kinematic viscosity between 30 and 600 cSt, other switch ranges on request

Operating data	DKME/A	
Operating pressure:	PN 250 bar (Brass)	PN 300 bar (Stainless steel)
Pressure drop:	0,02 - 0,4 bar	
Maximum temperature:	120 °C (optional 160 °C)	
Accuracy:	10% of full scale	
<b>Electrical data:</b>	<b>Normally open</b>	<b>Change over</b>
IP 65 (plug connection DIN 43650)	max. 250V • 3A • 100VA	max. 250V • 1,5A • 50VA
IP 67 (1m sealed in cable)		
Atex II 2G EEx m II T6 (2m sealed in cable)	max. 250V • 2A • 60VA	max. 250V • 1A • 30VA
EEx m II T6 (2m sealed in cable)	max. 250V • 2A • 60VA	max. 250V • 1A • 30VA
EEx ia IIC T6 (2m sealed in cable)	max. 45V • 1A	max. 45V • 1A
Output signal:	The contact opens / changes, when the flow falls below the set point.	
Power supply:	Not required (potentialfree reed contact)	
Other plug types or cable lengths on request		
<b>Material:</b>	<b>Brass</b>	<b>Stainless steel</b>
Wetted parts:	Brass	1.4571
Spring: (wetted part)	1.4571	
Magnets: (wetted part)	Hardferrit	
Housing: (wetted part)	Brass nickel-plated	1.4571

DKME/A 2 0001 05-04 E.M

